

OUVRIER CETTE PARTIE POUR LE RACCORDEMENT  
OPEN THIS PART FOR CONNECTION

- NOTA: POSTE FOURNI AVEC UNE POCHETTE COMPRENANT:**
- 1 BOUCHON D'OBTURATION
  - 1 ENTREE DE CABLE TYPE ESL9C6\*8 POUR CABLE Ø6 A 8 MAXI
  - 1 ENTREE DE CABLE TYPE ESL11C8\*1 POUR CABLE Ø8 A 10 MAXI
  - 1 BOUCHON REDUCTEUR PE11/PE9
- NOTA: STATION IS DELIVRED WITH BAG WHO INCLUDES:**
- 1 SEALING CAP
  - 1 CABLE ENTRY TYPE ESL9C6\*8 FOR Ø6/8 MAX CABLE
  - 1 CABLE ENTRY TYPE ESL11C8\*10 FOR Ø8/10 MAX CABLE
  - 1 REDUCER CABLE ENTRY PE11/PE9


**DESCRIPTION:**  
BOITIER EN ALLIAGE D'ALUMINIUM RECOUVERT D'UNE PEINTURE EPOXY.  
GLOBE EN POLYCARBONATE TRANSPARENT  
FERMETURE DU COUVERCLE SUR JOINT PLASTIQUE IMPERDABLE PAR 4 VIS DE SECURITE EN ACIER INOXYDABLE Ø6 A 6 PANS CREUX.  
EQUERRE DE FIXATION EN ACIER INOXYDABLE.  
-1 CARTE LED BLANCHE REF: WK054LEDW  
-1 CARTE FEU ECLAT LED REF: WK054FLD2-PROD  
RACCORDEMENT SUR BORNES A VISSER.  
ENTREES DE CABLE ( VOIR NOTA ).  
POIDS: 2.4KG.

**DESCRIPTION:**  
CASE ALUMINIUM ALLOY, EPOXY PAINT.  
POLYCARBONATE TRANSPARENT GLOBE  
COVER FIXED BY 4 STAINLESS-STEEL HEXAGONAL BOLTS.  
STAINLESS-STEEL BRACKET.  
-1 CARD LED WHITE REF: WK054LEDW  
-1 CARD LED RADIANCE REF: WK054FLD2-PROD  
CONNECTION ON SCREW TERMINAL BLOCKS.  
CABLE ENTRIES ( SEE NOTA ).  
WEIGHT: 2.4KG.

**RACCORDEMENT:**  
COUVERCLE ENLEVE  
**CONNECTION:**  
COVER REMOVED


**COURRANT D'APPEL TELEPHONIQUE**  
**TELEPHONE RING CURRENT**

**ALIMENTATION 230VCA**  
**INPUT 230VAC**

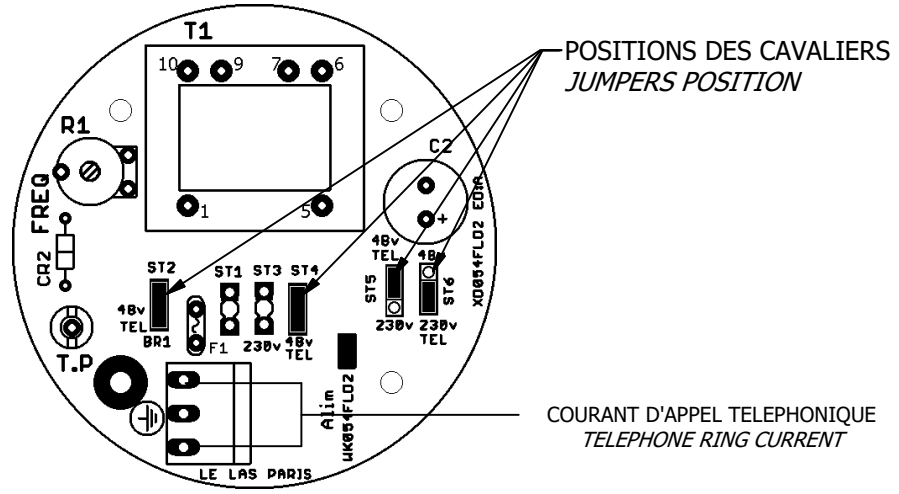

POSITIONS DES CAVALIERS  
JUMPERS POSITION

COURRANT D'APPEL TELEPHONIQUE  
TELEPHONE RING CURRENT

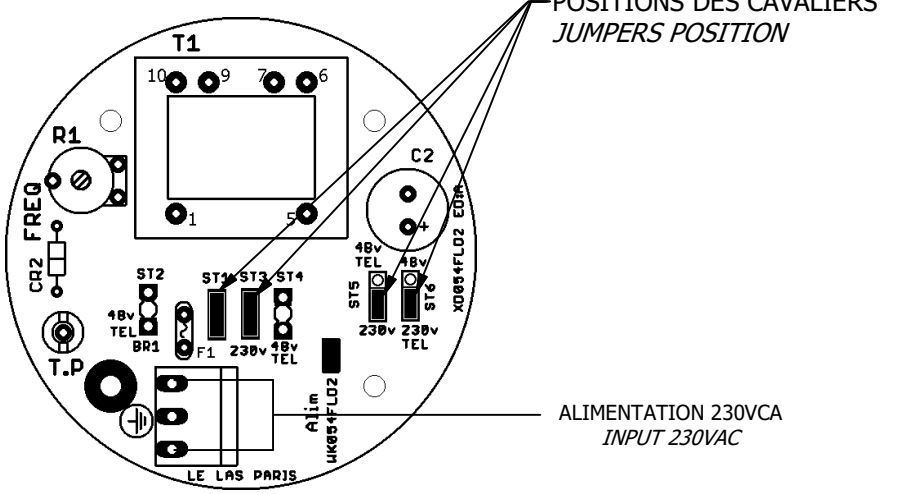

POSITIONS DES CAVALIERS  
JUMPERS POSITION

ALIMENTATION 230VCA  
INPUT 230VAC

DATES	REV.	ETABLI	MODIFICATIONS	VERIFIE	APPROUVE
Dates	Rev.	Prepared	Revisions	Checked	Approved
13/03/18		RS	SUIV. DM6500110-A	AB	MR
20/10/16	A	RS	1ère EMISSION/Initial issue	AB	MR

CONSTRUCTEUR  
Manufacturer  
**Groupe LE LAS**  
Matiere:  
Material

34-36 Rue Roger SALENGRO  
F94134 FONTENAY/BOIS

EXECUTION:

FEU ECLAT LED BLANC 360°  
ETANCHE 2 ENTREES  
48CC/230 VAC APPEL TELEPHONIQUE

ECH/Scale 0:5	CARTER 218	TYPE IDW	FOLIO 1/1
FEF9405E10CA8			REV. B