


OUVRIER CETTE PARTIE POUR LE RACCORDEMENT
OPEN THIS PART FOR CONNECTION

ENTREE / ENTRY

PRISE DE TERRE
EARTH SYSTEM

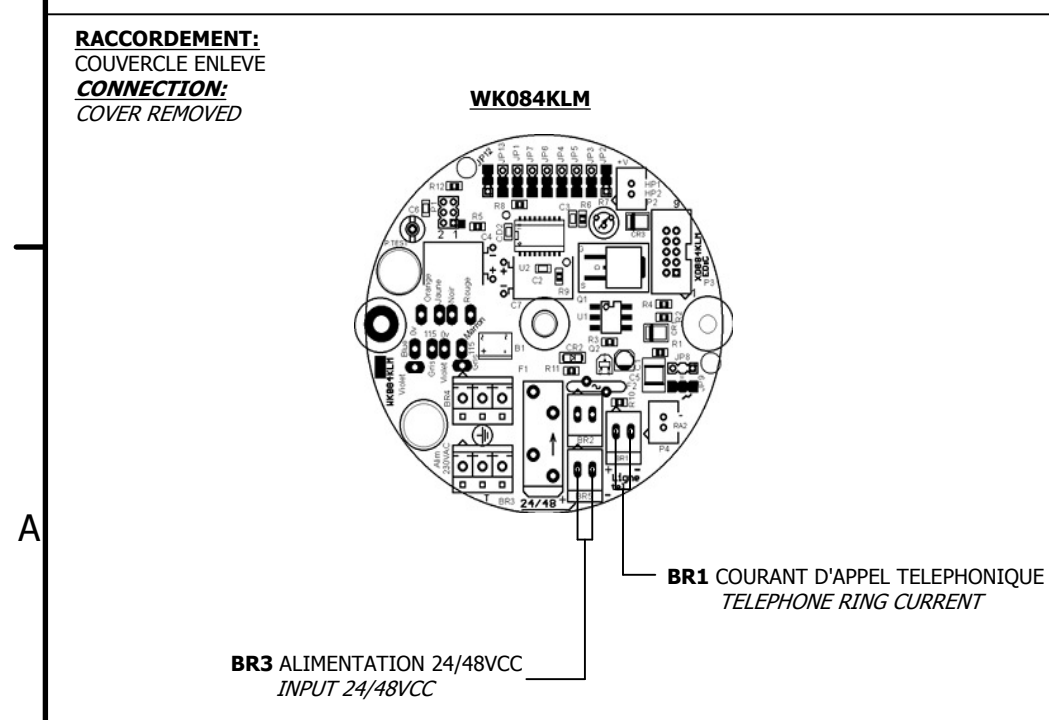

RACCORDEMENT:
COUVERCLE ENLEVE
CONNECTION:
COVER REMOVED

WK084KLM

BR1 COURANT D'APPEL TELEPHONIQUE
TELEPHONE RING CURRENT

BR3 ALIMENTATION 24/48VCC
INPUT 24/48VCC

DESCRIPTION:

BOITIER EN ALLIAGE D'ALUMINIUM RECOUVERT D'UNE PEINTURE EPOXY.
FERMETURE DU COUVERCLE SUR JOINT PLASTIQUE IMPERDABLE PAR 4 VIS DE SECURITE EN ACIER INOXYDABLE Ø8 A 6 PANS CREUX.
EQUERRE DE FIXATION EN ACIER INOXYDABLE.
MOTEUR ELECTRO-DYNAMIQUE A CHAMBRE DE COMPRESSION 15 WATTS REF: CE 225V7.
CARTE T WK084KLM
RACCORDEMENT SUR BORNES A VISSER.
ENTREES DE CABLE (VOIR NOTA).
POIDS: 5KG

DESCRIPTION:

CASE ALUMINIUM ALLOY, EPOXY PAINT.
COVER FIXED BY 4 STAINLESS-STEEL HEXAGONAL BOLTS.
STAINLESS-STEEL BRACKET.
ELECTRO-DYNAMIC MOTOR WITH COMPRESSION CHAMBER 15 WATTS REF: CE225V7.
CARD WK084KLM
CONNECTION ON SCREW TERMINAL BLOCKS.
CABLE ENTRIES (SEE NOTA).
WEIGHT: 5KG

NOTA: POSTE FOURNI AVEC UNE POCHETTE COMPRENANT:

- 1 BOUCHON D'OBTURATION BFO32UZ1NE3
- 1 ENTREE DE CABLE TYPE ESL9C6*8 POUR CABLE Ø6 A 8 MAXI
- 1 ENTREE DE CABLE TYPE ESL11C8*10 POUR CABLE Ø8 A 10 MAXI
- 1 BOUCHON REDUCTEUR PE11/PE9 BRE25UZ1NE3

NOTA: STATION IS DELIVRED WITH BAG WHO INCLUDES:

- 1 SEALING CAP BFO32UZ1NE3
- 1 CABLE ENTRY TYPE ESL9C6*8 FOR Ø6/8 MAX CABLE
- 1 CABLES ENTRY TYPE ESL11C8*10 FOR Ø8/10 MAX CABLE
- 1 REDUCERS CABLE ENTRY PE11/PE9 BRE25UZ1NE3

						CONSTRUCTEUR Manufacturer		Groupe LE LAS		34-36 Rue Roger SALENGRO F94134 FONTENAY/BOIS	
						MATIERE: Material		EXECUTION:		FOLIO	
						HURLEUR 6 TONS ETANCHE REG 90 A110 DB 24-48CC ET RELAIS TEL 1 OU 2 ENTREES		ECH/Scale 0:5		CARTER 218	
								TYPE IDW		1/1	
								KLM9405E2CC		REV. A	
08/02/16	A	RS	1ère EMISSION/Initial issue	AB	MR						
DATES Dates	REV. Rev.	ETABLI Prepared	MODIFICATIONS Revisions	VERIFIE Checked	APPROUVE Approved						