

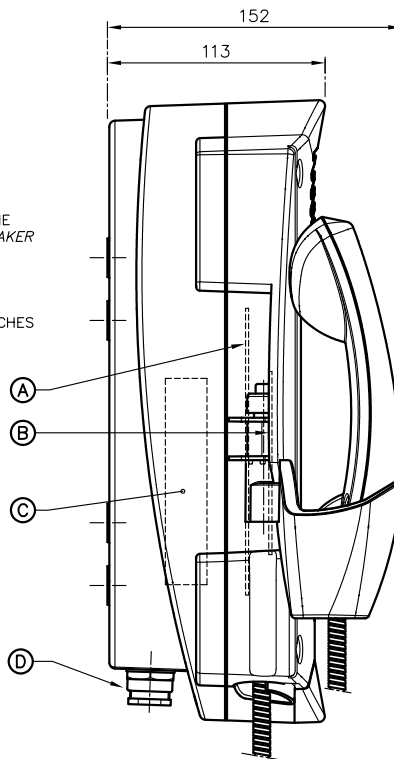


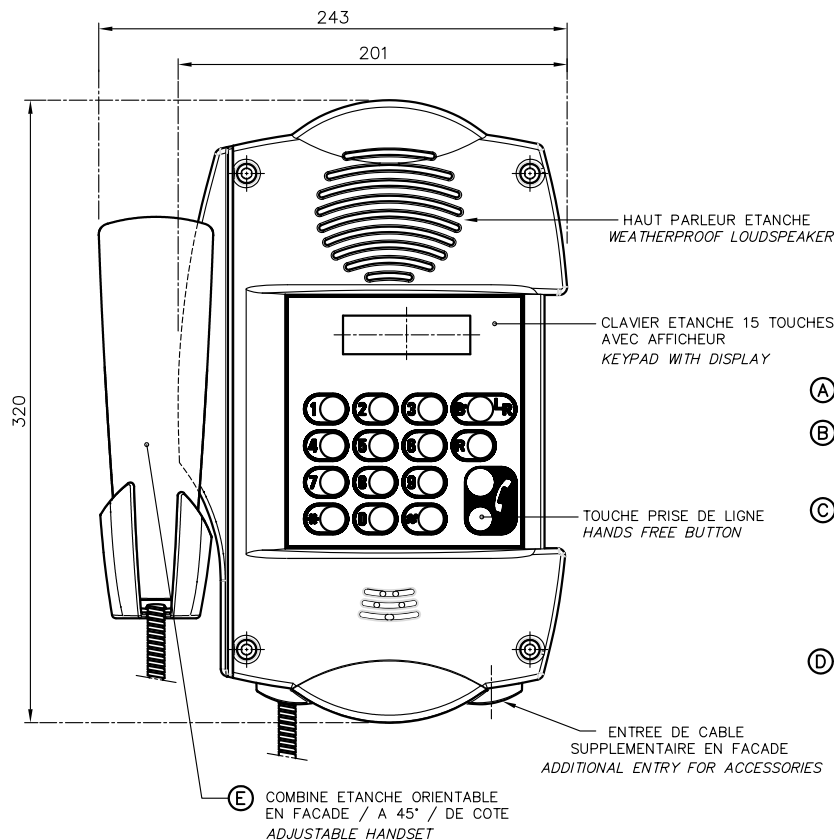


FIXATION INTERIEURE DRILLING FOR MOUNTING FROM INSIDE

2 MODES DE FIXATION / 2 FIXING METHODS

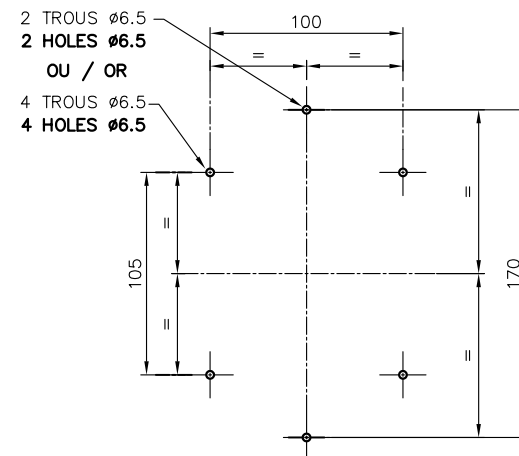

RACCORDEMENT WIRING



LIGNE TELEPHONE
TELEPHONE LINE

ATTESTATION UE DE TYPE POUR LE GROUPE II2GD
INERIS 09ATEX0074

Ex eb ib mb IIC T5 Gb
Ex ib tb IIIC T100°C Db IP64

TEMPERATURE AMBIANTE D'UTILISATION: Tamb. : -40°C < Ta < +60°C (T5)

EU-TYPE EXAMINATION CERTIFICATE GROUP II2GD
INERIS 09ATEX0079

Ex eb ib mb IIC T5 Gb
Ex ib tb IIIC T100°C Db IP64

OPERATING TEMPERATURE: Tamb. : -40°C < Ta < +60°C (T5)

DESCRIPTION

CARTER PROTEGE PAR SECURITE AUGMENTEE, REALISE EN POLYCARBONATE IGNIFUGE CHARGE FIBRE INOX.
COMPOSE D'UN CORPS FERME PAR UN COUVERCLE SUR JOINT D'ETANCHEITE MAINTENU PAR 4 VIS IMPERDABLE EN INOX.
CE TELEPHONE COMPREND:

A	CARTE TELEPHONE DC/MF	WK158CMAATX
B	CARTE CLAVIER 15 TOUCHES + AFFICHEUR	WK163CL9T
C	CARTE DE PROTECTION ENROBEE	WK098PLIATX
D	2 ENTREES DE CABLE EEx POUR CABLE Ø5 MINI A Ø9 MAXI	EEP13C5*9ATX
E	COMBINE AVEC GAINÉ METALLIQUE Lg:0m68	MS436A17G68
F	CARTE FEU FLASH ENROBEE	WK025FLDATX

POIDS: 2.3Kg

REFERENCE: TLA229A1C9GL

DESCRIPTION

CASING PROTECTED BY INCREASED SAFETY, MADE OF FLAME-RETARDANT POLYCARBONATE WITH FIBER-FILLED STAINLESS STEEL.
COMPOSED OF A BODY CLOSED BY A COVER ON A SEAL RETAINED BY 4 CAPTIVE STAINLESS STEEL SCREWS.
THIS PHONE INCLUDES:

A	TELEPHONE PCB DC/DTMF	WK158CMAATX
B	KEYBOARD PCB WITH 15-PUSH BUTTONS + DISPLAY	WK163CL9T
C	COATED PCB	WK098PLIATX
D	2 EEx CABLE GLANDS FOR CABLE Ø5 to Ø9 Max	EEP13C5*9ATX
E	COMBINED WITH METAL SHEATH Lg: 0m68	MS436A17G68
E	COATED FLASHING BEACON	WK025FLDATX

WEIGHT NET: 2.3Kg

REFERENCE: TLS229A1C9GL

CONSTRUCTEUR Manufacturer		EXECUTION:		Echelle/Tirair disk/Planche		Rev.	
L E L A S		99 RUE ALEXANDRE FOURNY 94500 CHAMPANY SUR MARNE		1/2		40	
MATERIE:		POSTE TELEPHONIQUE ATEX - II2GD		229A-ENC		Rev.	
		MANS LIBRES + CLAVIER 15 TOUCHES-AFFICHEUR + COMBINE				TLS229A1C9GL	
		FLAMEPROOF TELEPHONE - II2GD				B	
		HANDS FREE WITH KEYBOARD+DISPLAY+HANDSET					