


— RACCORDEMENT —




DESCRIPTION:
 TELEPHONE A CLAVIER 14 TOUCHES AVEC AFFICHEUR (2x16 CARACTERES)
 FEU FLASH SUR APPEL ENTRANT
 COMBINE EN POLYCARBONATE CHARGEE AVEC CORDON METALLIQUE EN INOX Lg: 0.68m
 MONTAGE A ENCASTRER, ETANCHE EN FACE AVANT (IP66).
 FACE AVANT EN PROFIL D'ALUMINIUM PEINTE (RAL7047)
 EXTREMITES DE FIXATION EN FONTE D'ALUMINIUM PEINTE (RAL7024).
 FERMETURE DE LA FACE AVANT S'EFFECTUE SUR JOINT D'ETANCHEITE
 PAR 4 VIS FRAISES Ø4.
 POIDS: 1.8Kg
 REFERENCE: TPX306FLC9G2

POIDS: 1.8Kg

REFERENCE: TPX306FLC9G2

— ENCASTREMENT —

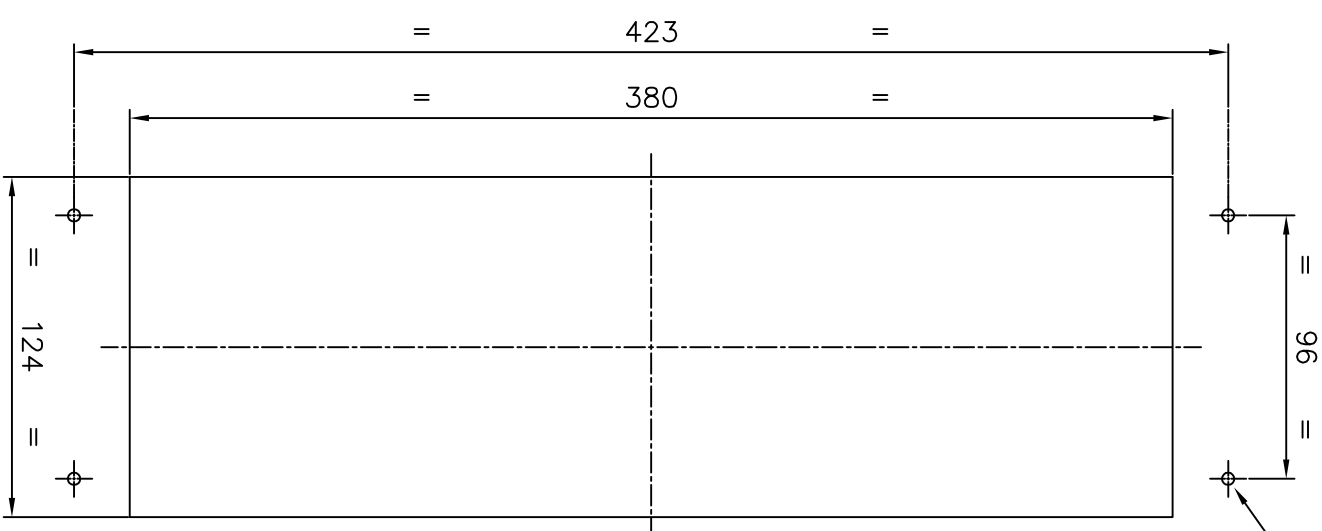

FIXATION DU POSTE PAR 4 VIS FRAISEES ØM4
 MONTAGE SUR PANNEAU > 3mm
 4 TROUS TARAUDES ØM4 SUR LE PANNEAU
 MONTAGE SUR PANNEAU < 3mm
 4 TROUS Ø4.5 FIXATION DU POSTE PAR L'ARRIERE DU PANNEAU AVEC 4 ECROUS ØM4.
 FIXATION OF THE POSTE BY 4 MILLED SCREWS ØM4 ASSEMBLY ON PANEL > 3mm
 4 HOLES ØM4 TAPPED ON THE PANEL ASSEMBLY ON PANEL < 3mm
 4 HOLES Ø4.5 FIXATION OF THE POST BY THE BACK OF THE PANEL WITH 4 NUTS ØM4.

DESCRIPTION:

TELEPHONE KEYPAD 14 BUTTONS WITH DISPLAY (2x16 CHARACTERS)
 FLASH ON ENTRING CALL
 POLYCARBONATE HANDSET WITH METAL TAIL (LENGTH 0.68m)
 FLUSH MOUNTING, WEATHERPROOF IP66
 FRONT PANEL PAINTED ALUMINIUM (RAL7047)
 WITH FIXATIONS IN CASTIRON PAINTED ALUMINIUM (RAL7024)
 CLOSING OF FACE PANEL IS MADE ON TIGHTNESS JOINT
 BY 4 SHAPPED SCREWS Ø4
 WEIGHT: 1.8Kg
 REFERENCE: TPX306FLC9G2

REFERENCE: TPX306FLC9G2

CONSTRUCTEUR		LE LAS		34/36 R. Roger SALENGRO F94134 FONTENAY/BOIS	
MATERIE:		TELEPHONE ETANCHE (IP66) A ENCASTRER		Echelle/Tiror Pign/Tiror disk/Pianche	
MATERIE:		CLAVIER-AFFICHEUR / FEU FLASH / COMBINE		1/2 306 306S-ENC	
MATERIE:		WEATHERPROOF (IP66) TELEPHONE SET		REV.	
MATERIE:		keypad display / Flashing Beacon / Handset		TPX9306FLC9G2, A	
22/07/15	A	B	1ere EMISSION/initial issue	R. S	M. R
DATES REV. ETABL	Rev.	ETABL	MODIFICATIONS	VERIFIE	APPROUVE
Dates	Rev.	Prepared	Revisions	Checked	Approved

LIGNE TELEPHONIQUE

— VUE DE DESSUS —
 = 120 =