



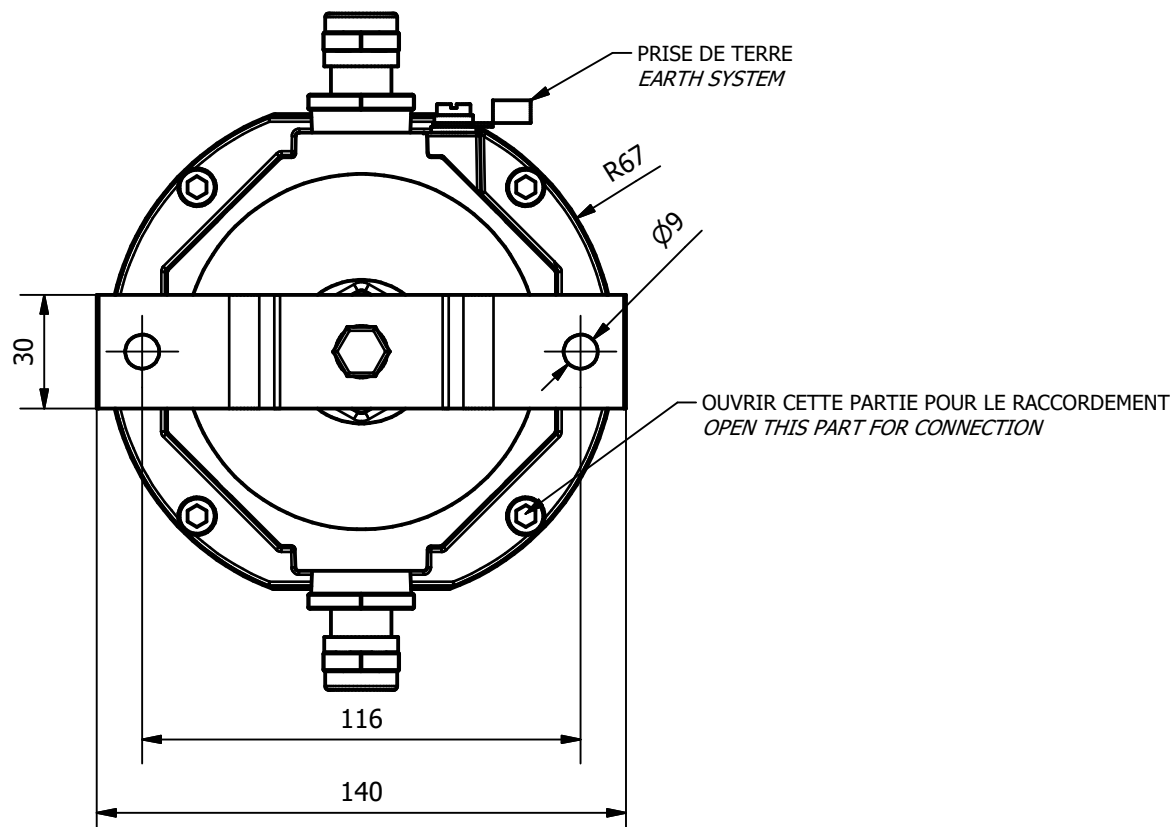

RACCORDEMENT:
COUVERCLE ENLEVE
CONNECTION:
COVER REMOVED


POUR 24/48VCC:
FOR 24/48VCC:
WK064CFF

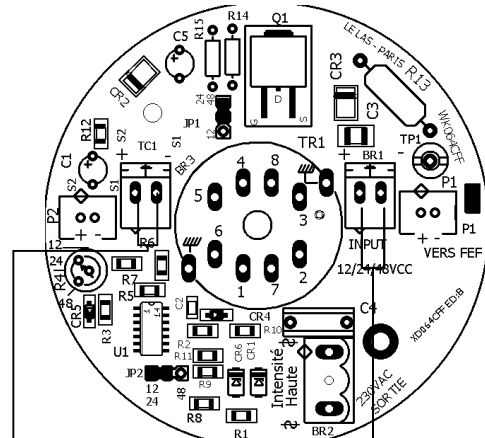

TC1 COURANT D'APPEL TELEPHONIQUE
TELEPHONE RING CURRENT

BR1 ALIMENTATION 24/48VCC
INPUT 24/48VCC

POUR 230VAC RETIRER LA CARTE WK064CFF
FOR 230VAC REMOVE CARD WK064CFF
WK064FEF/21J

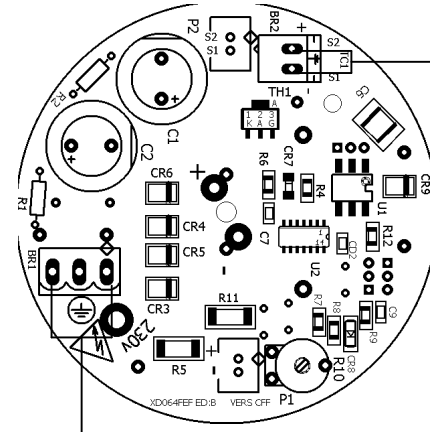

TC1 COURANT D'APPEL
TELEPHONIQUE
TELEPHONE RING CURRENT

BR3 ALIMENTATION 230VCA
INPUT 230VAC

DESCRIPTION:
BOITIER EN ALLIAGE D'ALUMINIUM RECOUVERT D'UNE PEINTURE EPOXY.
FERMETURE DU COUVERCLE SUR JOINT PLASTIQUE IMPERDABLE
PAR 4 VIS DE SECURITE EN ACIER INOXYDABLE
EQUERRE DE FIXATION EN ACIER INOXYDABLE.
CARTE WK064FEF/XXJ
RACCORDEMENT SUR BORNES A VISSER.
2 ENTREES POUR CABLE Ø SUR GAINÉ DE 7MM A 11MM(REF. EGM8ATX)
POIDS: 3KG.

DESCRIPTION:
CASE ALUMINIUM ALLOY, EPOXY PAINT.
COVER FIXED BY 4 STAINLESS-STEEL HEXAGONAL BOLTS.
STAINLESS-STEEL BRACKET.
CARD WK064FEF/XXJ.
CONNECTION ON SCREW TERMINAL BLOCKS.
2 CABLE GLAND FOR CABLE Ø ON SHEATH 7MM TO 11MM(REF. EGM8ATX)
WEIGHT: 3KG.



NOTA: POSTE FOURNI AVEC UNE POCHETTE COMPRENANT:
-1 BOUCHON D'OBTURATION (REF. CM432V2ATX)

NOTA: STATION IS DELIVRED WITH BAG WHO INCLUDES:
-1 SEALING CAP (REF. CM432V2ATX)

REF FEF				
REF.	PUISSANCE	-40°<Ta<+40°C	-40°<Ta<+60°C	MARQUAGE GAZ / POUSSIERE
FEF218A5...	5 Joules XENON	T6	T5	Ex db IIC T6 / Ex tb IIIC T85°C Db Ex db IIC T5 Gb / Ex tb IIIC T100°C Db
FEF218A10...	10 Joules LED	T6	T5	Ex db IIC T6 / Ex tb IIIC T85°C Db Ex db IIC T5 Gb / Ex tb IIIC T100°C Db
FEF218A15...	15 Joules XENON		T4	Ex db IIC T4 Gb / Ex tb IIIC T135°C Db
FEF218A21...	21 Joules XENON		T4	Ex db IIC T4 Gb / Ex tb IIIC T135°C Db

ALIMENTATION		GLOBE / GLASS	
REF.	ALIMENTATION	REF.	COLORS
FEF218A**CA8T	230VCA	FEF218A*****	CLEAR
FEF218A**CA7T	110VCA	FEF218A*****B	BLUE
FEF218A**CC	24/48VCC (xenon)	FEF218A*****J	ORANGE
FEF218A10CC	48VCC (led)	FEF218A*****R	RED
FEF218A10CC24	24VCC (led)	FEF218A*****V	GREEN
		FEF218A*****Y	YELLOW

						CONSTRUCTEUR Manufacturer			Groupe	LE LAS	99 RUE AEXANDRE FOURNY F94500 CHAMPIGNY SUR MARNE									
						MATIERE: Material					EXECUTION:		FOLIO							
						FEU FLASH ATEX IECEX 2 ENTREES EGM8ATX					ECH/Scale 1:2	CARTER 218A	TYPE IDW	1/1						
																FEF218A			REV. B	
11/07/24	B	RS	AJOUT TABLE VARIANT	AB	MR															
09/09/19	A	RS	1ère EMISSION/Initial issue	AB	MR															
DATES Dates	REV. Rev.	ETABLI Prepared	MODIFICATIONS Revisions	VERIFIE Checked	APPROUVE Approved															

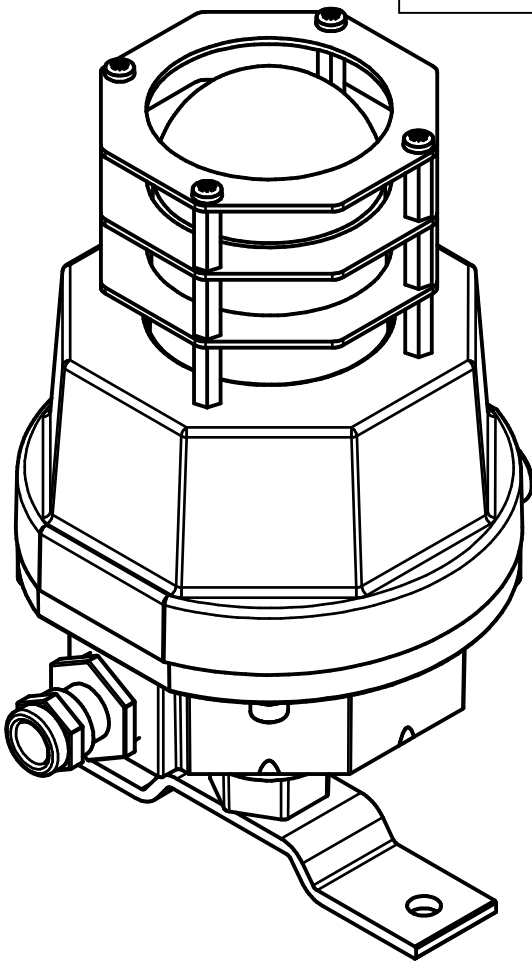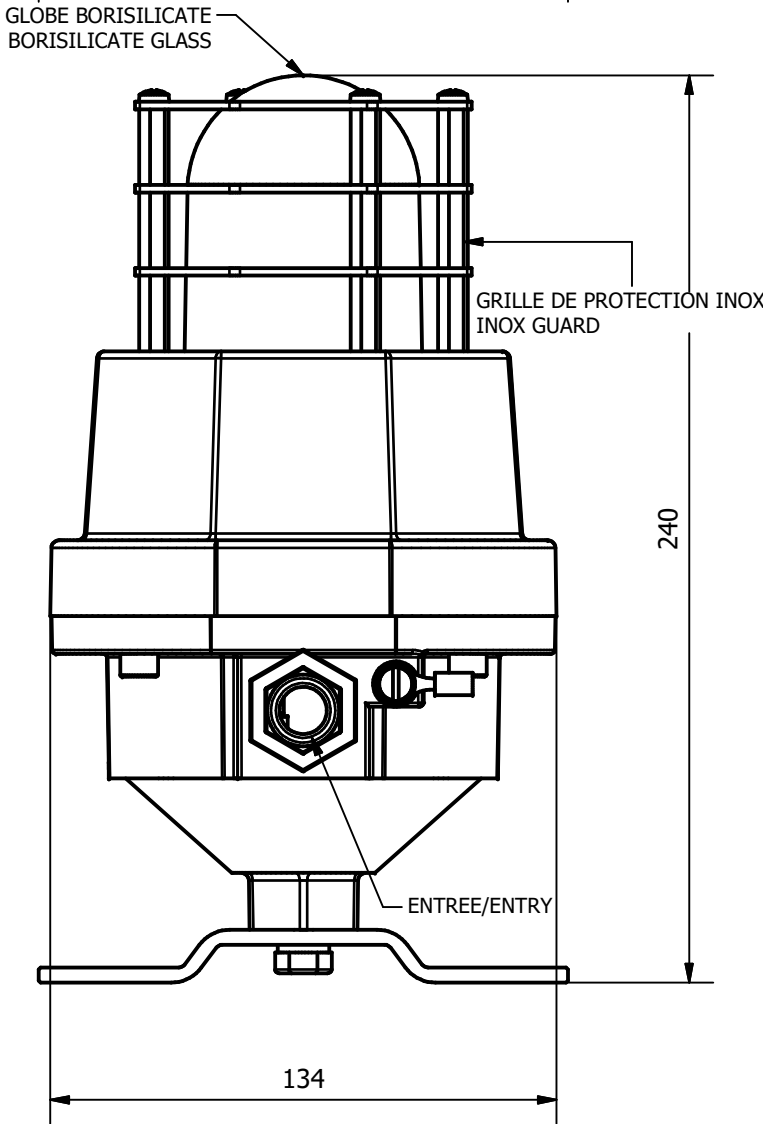

APPROUVÉ